
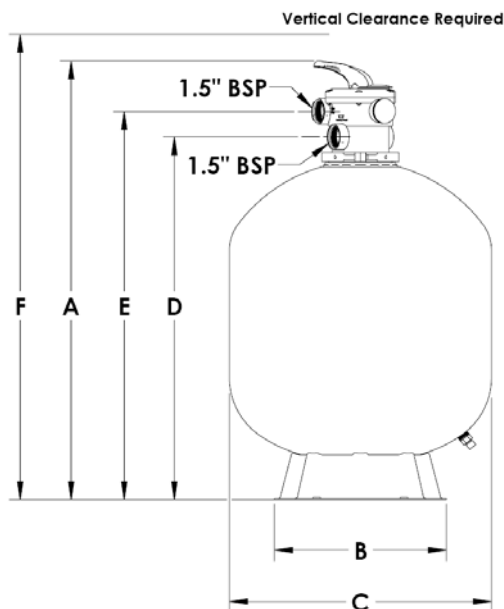


TECHNICAL DATA

TAGELUS® and TAGELUS® II with CLEARPRO TECHNOLOGY®

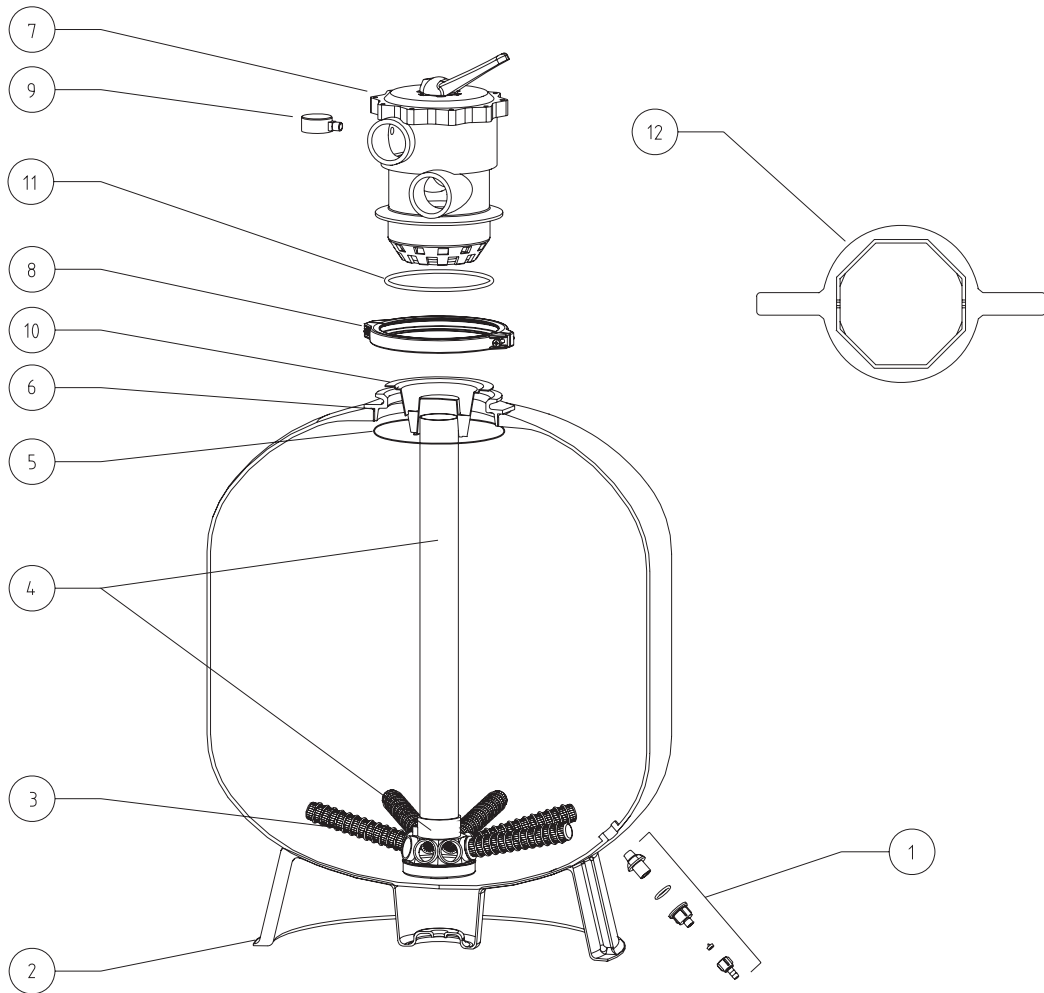

	F-19T6-TAG F-19T8-TACP	F-24T6-TAG F-24T8-TACP	F-30T8-TAG F-30T8-TACP
A	878	1009	1170
B	400	400	610
C	480	610	762
D	715	847	1026
E	774	904	1108
F	1194	1448	1664

TECHNICAL DATA – TECHNISCHE DATEN - TECHNISCHE GEGEVENS – DONNÉES TECHNIQUES
DATOS TÉCNICOS – DATI TECNICI

TAGELUS® and TAGELUS® II with CLEARPRO TECHNOLOGY®

No.	Reference	Description	Qty.
1	G-15-4696	Drain tap 3/4" high flow (complete)	1
2	G-15-4926	Black base for filter Ø 480 mm & Ø 610 mm (19" & 24")	1
2	G-15-4596	Black base for filter Ø 762 mm (30")	1
3	G-30-1904	Laterals for filter Ø 480 mm (19")	6
3	G-30-2404	Laterals for filter Ø 610 mm (24")	6
3	G-30-3004	Laterals for filter Ø 762 mm (30")	8
3	G-30-1904CP	ClearPro Laterals for filter Ø 480 mm (19")	8
3	G-30-2404CP	ClearPro Laterals for filter Ø 610 mm (24")	8
3	G-30-3004CP	ClearPro Laterals for filter Ø 762 mm (30")	8
4	G-SPS-19TAG	Stand Pipe Set for filter Ø 480 mm (19"), consisting of hub and standpipe	1
4	G-SPS-24TAG	Stand Pipe Set for filter Ø 610 mm (24"), consisting of hub and standpipe	1
4	G-SPS-30TAG	Stand Pipe Set for filter Ø 762 mm (30"), consisting of hub and standpipe	1
4	G-SPS-19TACP	Stand Pipe Set for ClearPro filter Ø 480 mm (19"), consisting of ClearPro hub and standpipe	1
4	G-SPS-24TACP	Stand Pipe Set for ClearPro filter Ø 610 mm (24"), consisting of ClearPro hub and standpipe	1
4	G-SPS-30TACP	Stand Pipe Set for ClearPro filter Ø 762 mm (30"), consisting of ClearPro hub and standpipe	1
5	G-15-4493	O-ring 146 x 4 mm Bunan for filter Ø 480 mm & Ø 610 mm (19" & 24")	1
5	G-15-2501	O-ring 209.14 x 3.17 mm Bunan for filter Ø 762 mm (30")	1
6	G-15-5225	Adaptor 6" V-thread for filter Ø 480 mm & Ø 610 mm (19" & 24")	1
6	G-15-4514	Adaptor 8 ½" for 2" TM valve for filter Ø 762 mm (30")	1
7	E-27-2026ND	Black 1 ½" TM valve with 50 mm connection for filter Ø 480 mm & Ø 610 mm (19" & 24")	1
7	E-27-2029	Black 2" TM valve with 63 mm connection for filter Ø 762 mm (30")	1
8	E-27-2025	Black plastic ABS-GF clamp & screws and nuts for filter Ø 480 mm & Ø 610 mm (19" & 24")	1
8	E-27-2028	Black plastic ABS-GF clamp & screws and nuts for filter Ø 762 mm (30")	1
9	G-15-2047	Pressure gauge ¼" NPT bottom connection	1
10	G-15-5051	Sand guide	1
11	G-28-1008	O-ring EPDM 70° shore 1238 x 533 mm for filter Ø 480 mm & Ø 610 mm (19" & 24")	1
11	G-25-0001	O-ring NBR 165 x 5 mm 70° shore A for filter Ø 762 mm (30")	1
12	G-15-4512	Wrench 6" closure, only for filter Ø 480 mm & Ø 610 mm (19" & 24")	1

TRITON® - TAGELUS® - TRITON® II & TAGELUS® II with CLEARPRO TECHNOLOGY®

	F-19S8-TRV	F-19S8-TRCP	F-19T6-TAG	F-19T8-TACP	F-24S8-TRV	F-24S8-TRCP	F-24T6-TAG	F-24T8-TACP	F-30S8-TRV	F-30S8-TRCP	F-30T8-TAG	F-30T8-TACP	F-36S8-TRV	F-36S8-TRCP
Diameter	φ 480 mm (19")				φ 610 mm (24")				φ 762 mm (30")				φ 914 mm (36")	
Filter area (m ²)	0,17				0,29				0,45				0,64	
Filter flow rate (m ³ /h)	8,5				14				22				32	
Gravel φ 3 -> 5 mm (kg)	20	20	15	15	40	40	17	17	80	80	50	50	120	120
Sand φ 0,4 -> 0,8 mm (kg)	52	52	70	70	108	108	150	150	200	200	235	235	310	310